

Contactless REX Door Release Button

REX-TL-SG

REX-WED-FOB

(with Wireless Handheld Fob Transmitter)

Technology & Function:

REX-TL-SG / REX-WED-FOB

- Capacitive Proximity Technology for Contactless Door Release
- Back-Light Design – Blue to Green Upon Trigger
- Built-in Buzzer – Audible Tone Upon Trigger
- Dry Contact Interfaces with Netgen Controller
- Built-in Mechanical Over-ride In Case of Power Failure
- Built-in Digital Time to Control the Relay Output Timing from 1-60 Seconds
- Dip-Switch to Adjust the Sensitivity

Optional Unit with Wireless Handheld Fob Transmitter:

REX-WED-FOB

- Wireless Transmitter Can Trigger the REX Remotely



Specifications:

	REX-TL-SG	REX-WED-FOB
--	-----------	-------------

Functional Specification:	REX-TL-SG	REX-WED-FOB
Request to Exit indication	Color changes from Blue to Green with a beep	Color changes from Blue to Green with a beep
Request to Exit output	Dry contact output	Dry contact output
REX Relay	NC/NO jumper selectable rated @ 30Vdc; 1A	NC/NO jumper selectable rated @ 30Vdc; 1A
Mechanical Override	Available	Available
Output Timer	From 1 sec to 60 sec	From 1 sec to 60 sec
Remote Button (Optional)	-	433MHz or 315MHz (Max supports 5 remote buttons at the same time)
Dimension	4.65" (L) x 2.92" (W) x .33" (H)	4.65" (L) x 2.92" (W) x .33" (H)


Technical Specifications:

Typical Read range	~2.5 cm	~2.5 cm
Electric Gang Box Requirement	Fits Most Single Gang Boxes	Fits Most Single Gang Boxes
Weight	5.54 Ounces	5.54 Ounces

Operating Specification:

Operating Voltage	10-24VDC	Case material	PC+ABS
Operating Current	100mA (max @ 24Vdc)	Standard Color	Black & White
Operating Temperature	-20°-60°	Operating Humidity	10% - 90%

Distributed by:

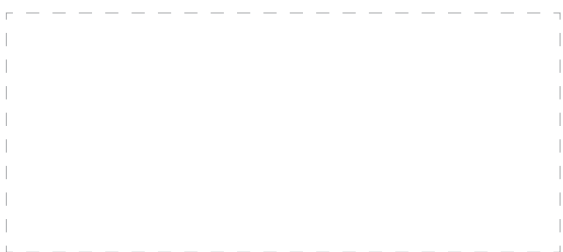

Tel: 760-929-9596
Email: Sales@BlueWaveSecurity.com
BlueWaveSecurity.com

COMPLETE
CAMERAS
CONTROLLER
SOFTWARE
CREDENTIAL READER
LOCKING DEVICE
REX SENSOR
ACCESSORIES
POWER