
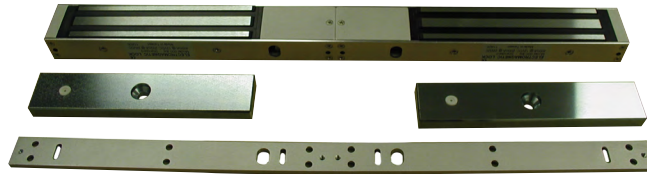


The EM-600 Series Electromagnetic Locks

EM-600 & EM-600-D

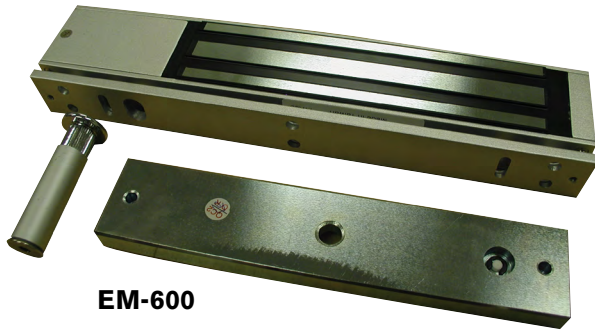

EM-600 Series Maglock: 600 lb. holding force electromagnetic lock recommended for access-controlled interior rooms and secure areas within buildings.

Specifications:

	EM-600	EM-600-D
Holding Force	600 lb. holding force	1200 lb. holding force
Suitable for	90° degree out-swinging doors	90° degree out-swinging doors
Power	Low power consumption with high efficiency	Low power consumption with high efficiency
Indicator	LED indicator and monitor output	LED indicator and monitor output
Mounting	Surface mounts easily	Surface mounts easily
Finish	Attractive brushed stainless steel finish (US32D)	Attractive brushed stainless steel finish (US32D)
Materials	Use of solid steel material allows strong holding force and no residual magnetism	Use of solid steel material allows strong holding force and no residual magnetism

Features:

	EM-600	EM-600-D
Power Supply	12VDC or 24VDC	12VDC or 24VDC
Current	500mA @ 12V or 250mA @ 24V	500mA @ 12V or 250mA @ 24V
Fail type	Fail-Safe	Fail-Safe
Indicator	Built-in lock status LED's indication <ul style="list-style-type: none"> • LED indicator with bond sensor • Terminals to monitor bond included • Red = Power On • Green = Bond Sensor Activated 	Built-in lock status LED's indication <ul style="list-style-type: none"> • LED indicator with bond sensor • Terminals to monitor bond included • Red = Power On • Green = Bond Sensor Activated
Dimensions	Single lock: 9.85" (L) x 1.65" (W) x 0.98" (D)	Double lock: 19.88" (L) x 1.66" (W) x 0.98" (D)

Accessories:

EM-BR600: L and Z brackets for 600lb. maglocks

EM-UB600: U bracket glass holder for 600lb. maglocks

EM-AP600: Armature plate housing for 600lb. maglocks



Distributed by:

Tel: 760-929-9596
 Email: Sales@BlueWaveSecurity.com
BlueWaveSecurity.com

COMPLETE

CAMERAS

CONTROLLER

SOFTWARE

CREDENTIAL
READER

LOCKING
DEVICE

REX SENSOR

ACCESSORIES

POWER